


Congratulations on your purchase. You now have one of Nags Head Hammocks' innovative products! If you have any questions regarding this product, we invite you to call us 7 days a week at 800-344-6433.

Helpful tips before starting: • Get someone to help you. Some pieces are heavy and a second pair of hands always helps. • Do not tighten the bolts completely until the product is fully assembled. Some pieces are harder to fit in place and this will help. A hammer or rubber mallet is needed during assembly. • Do not over-tighten the bolts or screws. • The photos in our product catalog can provide additional help while assembling your item. • Build your item close to where it will be used to eliminate difficulty in moving once completed. • For a uniform look, face all nuts in the same direction.



Step 1. Align left arm with swing body. Insert 3.5" hex bolt through washer, through arm and swing body. Secure using washer and nut. Use this same process for all three holes. FIGURE 1

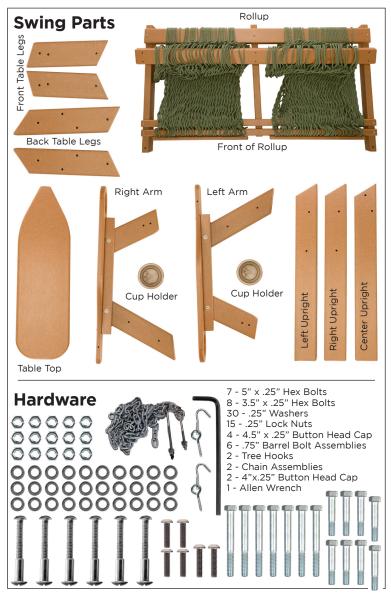






Step 3. Lay upper body rollup to front of swing as shown. FIGURE 2



Step 4. Attach left outside upright with 3.5" hex bolt in bottom hole, making sure washers are touching both sides of upright. Secure with nut. FIGURE 3 $\,$



Step 5. Using a 4" button head bolt in upper hole, secure left outside upright. FIGURE 4



Step 6. Repeat Steps 4 and 5 for right outside upright.

Step 7. Attach front table legs using 5" hex bolt and washers. make sure angle of feet matches photo. FIGURE 5 $\,$





Step 8. Attach back table legs which are longer than front legs using 5" hex bolts and washers. FIGURE 6 Step 15. Attach left side of roll up with 4.5" button head bolt and .75" binding posts in bottom hole. FIGURE 13

Step 16. Repeat Step 15 for right side.

Step 17. Tighten all bolts.



Step 9. Attach table top using 5" hex bolts and washers.

Step 10. Place rear legs in seat as shown. Lift seat back to allow table to seed into place. FIGURE 7 & FIGURE 8





Step 11. Secure table back with 5" bolt and nut, using washers on both sides. FIGURE 9

Step 12. Secure table front with two 5" bolts and washers. FIGURE 10



Step 13. Attach center upright with two 5" bolts and washers. FIGURE 11

Step 14. Starting with center upright, attach rollup with two 4.5" button head bolts and .75" binding posts. FIGURE 12





Care Instruction and Tips: Great care has been put into manufacturing this item. However, it is made of high density resin and some natural esthetic imperfections and dark spots are normal and should be expected. You can wash the wood and the rope using a hose and some bleach water. You can also brush the wood to help remove dirt. *These instructions are also available at www.nagsheadhammocks.com/assembly_instructions.asp Warranty: Products of Nags Head Hammocks are guaranteed to be free of defects in workmanship or material. We will replace defective parts for free. Simply call us and we will see that you get what you need. Prolonged exposure to weather conditions including snow, rain, and humidity are not covered under the warranty nor is damage caused by normal wear, mildew, improper care including storage, maintenance, and assembly. Returns: Nags Head Hammocks has a money back guarantee. If you are not satisfied with an item, return it unused in its original packaging for a complete merchandise refund or exchange. You can return it to any store or to our warehouse, Nags Head Hammocks, 305 Industrial Bd., Greenville, NC 27834. Please include a copy of your receipt and your contact information. Nags Head Hammocks, PO Box 533, Nags Head, NC 27959

Step 18. Insert plastic drink holders. FIGURE 14



Step 19. Secure long bolt of chain to back in top hole on of rollup. FIGURE 15 Step 20. Secure short bolt to front of swing. FIGURE 16





Step 21. Space hooks to hang swing 50"-54" apart. Step 22. Hang swing to desired height.

Step 23. Enjoy your new Nags Head Hammock Deluxe Double Swing.